


**HEAT SHRINKABLE CABLE ACCESSORIES**


DESCRIPTION OF TYPE

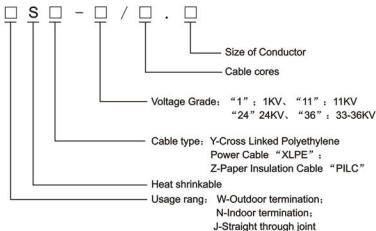


Size of Conductor: "0" : 10-16mm<sup>2</sup>;  
"1" : 20-50mm<sup>2</sup>;  
"2" : 70-120mm<sup>2</sup>;  
"3" : 150-240mm<sup>2</sup>;  
"4" : 300-500mm<sup>2</sup>.

Cable cores: From 1C to 5C.

For example:  
"WSY-11/3.1" : 11KV "XLPE" cable  
Heat-shrinkable outdoor termination:  
three cores, Size of Conductor is 25-50mm<sup>2</sup>.

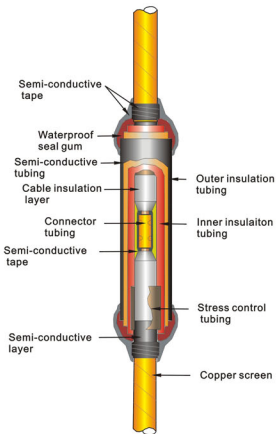

Single-core heat shrinkable straight through joint

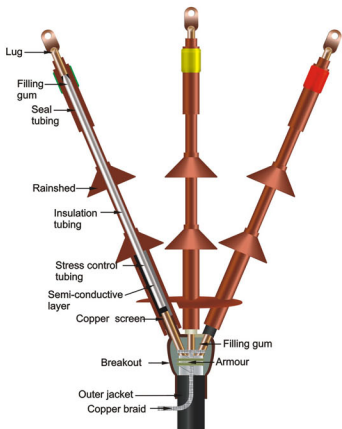


3-cores heat shrinkable outdoor termination

## 36KV HEAT SHRINKABLE CABLE ACCESSORIES

### Technical Data

Property	Typical data
Ac withstand(under rain)	117KV/1min
Ac withstand(without rain)	117KV/1min
Impulse withstand	±250KV/10times
Dc withstand	-156KV/15min
Ac withstand	104KV/4h
Partial discharge test	≤10Pc(1.73U <sub>0</sub> )

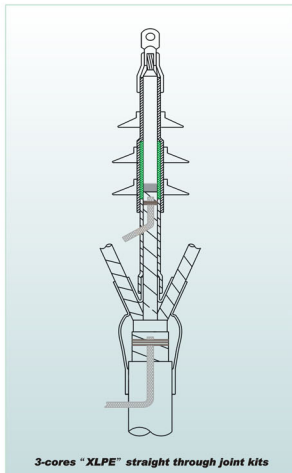

**3-cores "XLPE" straight through joint kits**

Description of goods	Specification	Size of Conductor (mm <sup>2</sup> )	Description of goods	Specification	Size of Conductor (mm <sup>2</sup> )
Single core "XLPE" indoor termination kits	NSY-36/1.1 NSY-36/1.2 NSY-36/1.3 NSY-36/1.4	50-120 150-240 300-500	3-cores indoor termination kits	NSY-36/3.1 NSY-36/3.2 NSY-36/3.3 NSY-36/3.4	50-120 150-240 300-500
Single core "XLPE" outdoor termination kits	WSY-36/1.1 WSY-36/1.2 WSY-36/1.3 WSY-36/1.4	50-120 150-240 300-500	3-cores outdoor termination kits	WSY-36/3.1 WSY-36/3.2 WSY-36/3.3 WSY-36/3.4	50-120 150-240 300-500
Single core "XLPE" straight through joint	JSY-36/1.1 JSY-36/1.2 JSY-36/1.3 JSY-36/1.4	50-120 150-240 300-500	3-cores straight through joint	JSY-36/3.1 JSY-36/3.2 JSY-36/3.3 JSY-36/3.4	50-120 150-240 300-500

Dimension(mm)